




Fire Gard Fire Curtain Store anti-feu Cortina antifuego

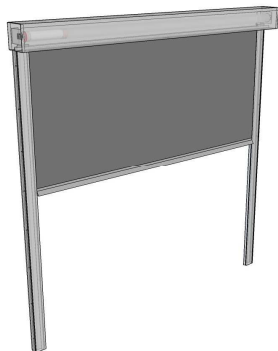

FEATURES

CARACTÉRISTIQUES

CARACTERÍSTICAS

Intelligent gravity fail-safe descent.	Descente intelligente à sécurité intégrée.	Descenso inteligente con seguridad integrada.
Prevents the spread of fire & smoke up to 4 hours.	Empêche la propagation du feu et de la fumée jusqu'à 4 heures.	Evita la propagación del fuego y el humo hasta 4 horas.
Compact & discreet design.	Design compact et discret.	Diseño compacto y discreto.
Lightweight.	Léger.	Ligereza.
Easy to install.	Facile à installer.	Fácil de instalar.
Available as either insulated or non-insulated.	Disponible comme isolant ou non-isolé.	Disponible como aislamiento o sin aislamiento.
Vertical & horizontal application.	Application verticale et horizontale.	Aplicación vertical y horizontal.
Suitable for use in áreas with low headroom & large openings.	Convient pour une utilisation dans les zones à faible hauteur libre et grandes ouvertures.	Adecuado para su uso en áreas con poco espacio libre y grandes aberturas.
Lowest lifetime running & maintenance costs.	Les plus faibles coûts de fonctionnement et d'entretien à vie.	Costes operativos y de mantenimiento más bajos.

COMPLIANCE CONFORMITÉ CUMPLIMIENTO

Comply to the following standards Se conformer aux normes suivantes Cumple los siguientes estándares

BS 476 Part 22	EN 12101-1:32006	EN 12101-1:2005 & A1:2006	BS8434-2	BS EN 949:2000	BS EN 1636-1:1999
BS EN 1363-1:2000	BS EN 1363-2	BS EN 1634-1:2000	BS 8434-2	EN 13501-2:2007 & A1:2009	BS EN 1634-3:2004

INSTALLATION INSTALLATION INSTALACIÓN

All NECO Fire Grand fire curtains are made to order.
Installation and training is available for all our fire safety products

Tous les rideaux coupe-feu NECO Fire Grand sont fabriqués sur commande.
L'installation et la formation sont disponibles pour tous nos produits de sécurité incendie.

Todas las cortinas contraincendios NECO Fire Grand se fabrican bajo pedido.
La instalación y la capacitación están disponibles para todos nuestros productos de seguridad contra incendios.



DC Gravity & Controlled Descent and Non-Gravity Fail-Safe Tubular Motors

Descente par gravité et à commande contrôlée et moteurs tubulaires à sécurité non gravitaire.

Descenso controlado por gravedad y motores tubulares con seguridad sin gravedad



FEATURES

- Lifting capacity up to 200kg.
- Gravity Fail-Safe feature available on models: DC55G, DC55G-25, DC80G, DC80G-19 & DC95G.
- Suitable for use with Fire/Smoke Curtains, Fire Shutters and High Usage Doors.
- Tested and approved by Exova, Warringtonfire.
- Unique patented design.

TECHNICAL INFORMATION

	DC55	DC55G	DC55G-25	DC80	DC80G	DC80G-19	DC95	DC95G
Voltage	24v	24v	24v	24v	24v	24v	24v	24v
Current	3.2a	3.2a	3.2a	8.5a	8.5a	8.5a	10.8a	10.8a
Running Time	30min	30min	30min	30min	30min	30min	30min	30min
Torque	30nm	15nm	25nm	80nm	80nm	30nm	120nm	100nm
RPM	18rpm	40rpm	25rpm	12rpm	12rpm	19rpm	10rpm	8rpm
Drop Weight	n/a	10kg	20kg	n/a	20kg	10kg	n/a	25kg
Lifting Capacity	50kg	15kg	15kg	100kg	80kg	40kg	200kg	100kg

	DC110	DC120	DC140	DC140Q	DC1602
Voltage	24v	24v	24v	24v	24v
Current	10.8a	19.8a	18.5a	19.8a	14.5a
Running Time	30min	30min	30min	30min	30min
Torque	200nm	380nm	420nm	600nm	600nm
RPM	10rpm	8rpm	6.5rpm	140rpm	4.2rpm
Lifting Capacity	300kg	400kg	600kg	50kg	800kg

THE MOST EFFICIENT & COST EFFECTIVE FIRE SAFETY PRODUCTS ON THE MARKET

LES PRODUITS DE SÉCURITÉ INCENDIE LES PLUS EFFICACES ET LES PLUS COÛT EFFICACE SUR LE MARCHÉ

LOS PRODUCTOS DE SEGURIDAD CONTRA INCENDIOS MÁS EFICIENTES Y ECONÓMICOS DEL MERCADO

